

FPCP-235 Pedal pump-cylinder unit

- with pushing cylinder

The FPCP-235 combines a pedal operated pump with a pushing cylinder and an oil reservoir into a single stainless steel unit.

Application

FPCP-235 is designed to be used for height adjustment or tilt jack on containers, trolleys etc. as an all-in-one hydraulic system.

Features

- ☑ Throttled retraction to prevent sudden drop of load
- ☑ Spring centered pedal
- ☑ Cleaning friendly
- ☑ Sealed according to IP68
- ☑ Maintenance free
- ☑ Easy to install
- ☑ Customized pedal designs possible

Specifications

Stroke (standard)	Fluid
235 mm	Mineral/Synthetic oil
Pump/piston ratio	Extraction/stroke
1:4	5 mm
Reservoir	Weight
0.8 L	6.5 kg



Installation


The lower base flange is attached to the container frame by means of four bolts.

The piston rod can be fitted on to the frame with a customer specific end bracket.

Hydraulics

The FPCP-235 is factory filled with hydraulic fluid (fulfilling NFS-H1 requirements) and virtually maintenance free.

The pump/cylinder piston area ratio is 1:4, so a force of 1 kN applied to the pedal equals a cylinder pushing force of 4 kN.

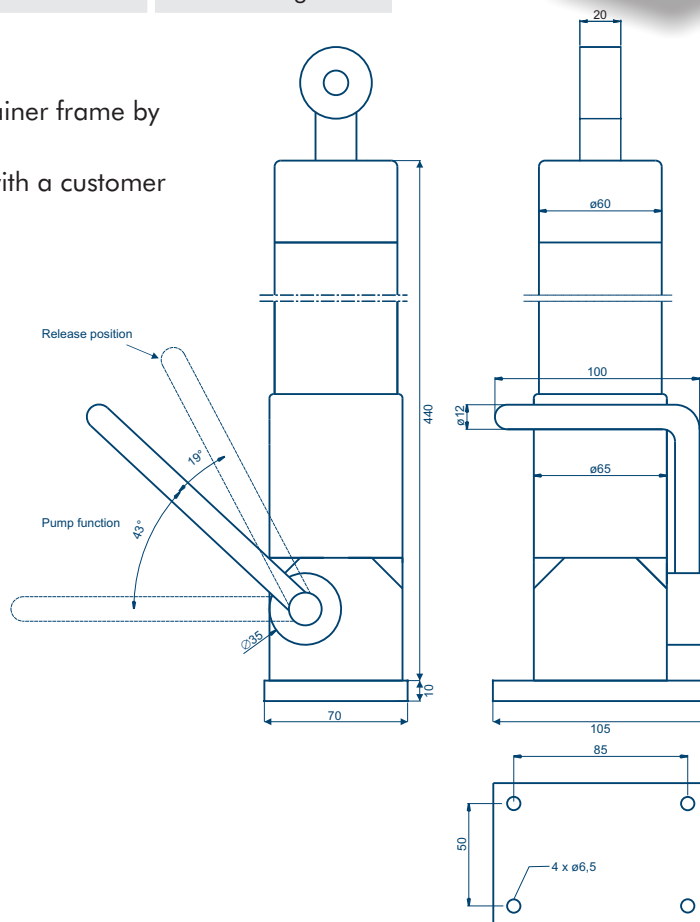

SSH Stainless a-s

Englandsvej 20-22 • 5700 Svendborg • Denmark
 Tel: +45 6221 8531 • Fax: +45 6221 7840
 Email: ssh@ssh-stainless.dk • www.ssh-stainless.dk

**Stainless
Steel
Hydraulics**